

AUTO
(RESTAR)

PWM

FG


RD
SIGNAL H

RD
SIGNAL L

DC AXIAL FAN

□ 40 x 40 x 56 mm

GW4056
Series



Impeller : 5 blades ,made of plastic PBT UL94 V-0

扇 叶: 5叶, PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0

扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 poles brushless DC motor


電 機: 4极无刷直流电机

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH₂O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
GW405612M	B/S	12	6.0~13.5	0.85	11000	26	0.74	1.50	373.5	58	96
GW405612H	B/S	12	6.0~13.5	1.25	14000	30	0.85	2.03	505.5	61	96
GW405612E	B/S	12	6.0~13.5	1.50	15600	32.4	0.91	2.64	657.4	64	96


AIR SPACE

直流轴流风扇

Air Flow & Static Pressure Curve

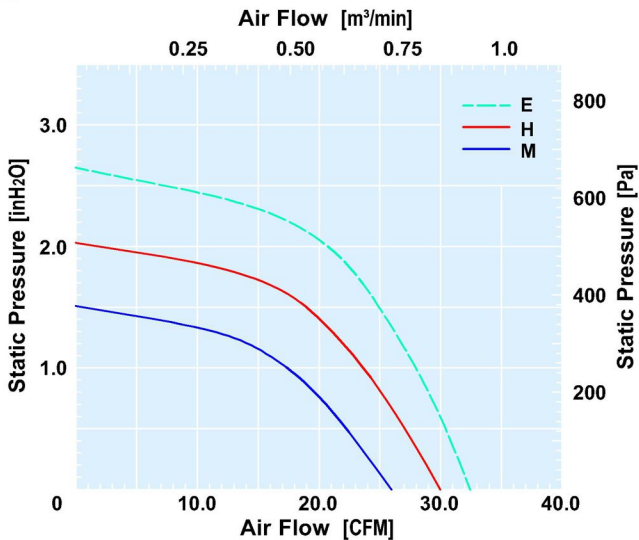

Dimensions Drawing

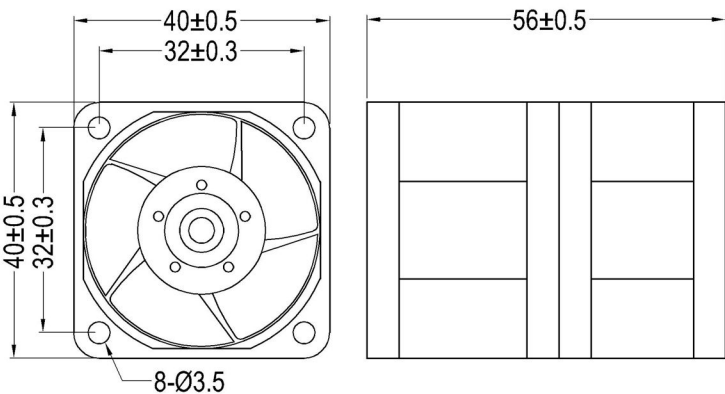

Above specification is only for reference and subject to change without notice.
以上数据仅供参考，如有变更恕不另行通知。

www.pudaelec.com