



AIR SPACE

交流离心风机

www.pudaelec.com

S120
Series

AC Centrifugal Fan
Ø120 x 87



RoHS

Impeller : Made of SPCC

風輪: 冷軋板

Motor : Enter rotor & capacitor-run induction motor

電機: 外转子电容运转异步電機

Degree of protection : IP44

防护等级: IP44

Insulation class : F

绝缘等级:F


Operating temperature : -25~+80°C

工作温度: -25~+80°C




Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Freq. (频率) [Hz]	Current (电流) [A]	Input power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [in-H ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
S120HA1	Ball	1~115	60	0.70	80	3200	165	280	1.687	420	55	1800
S120HA2	Ball	1~230	50	0.22	50	2600	153	260	1.406	350	51	1800
S120HA4	Ball	3~380	50	0.14	60	2600	153	260	1.406	350	51	1800

Dimensions Drawing

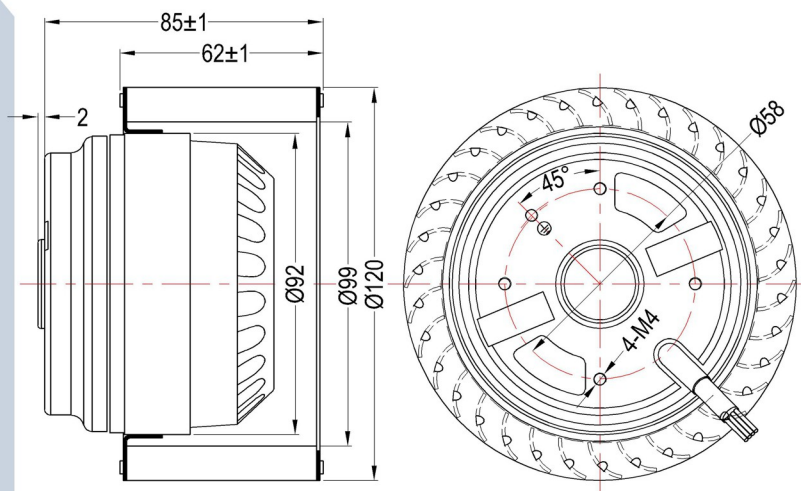

Air Flow & Static Pressure Curve

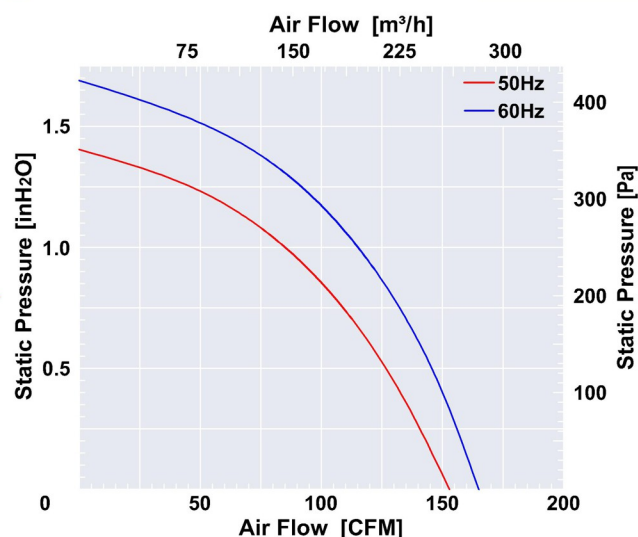

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。

普新惠达