



AIR SPACE

DC EC 离心風機

www.pudaelec.com

18092
Series

DC/EC Centrifugal Fan
Ø180 x 92 mm

AUTO
RESTAR

PWM

FG

SS
Soft Starter

V_{sp}
0-5V

Impeller : Made of galvanized sheet steel

風 輪: 鍍鋅鋼板

Motor : DC brushless motor

電 機: 直流无刷電機

Degree of protection : IP42

防护等级: IP42

Operating temperature : -25~+70°C

工作温度: -25~+70°C



DC SPECIFICATIONS

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VDC]	Voltage Range (电压范围) [VDC]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [In-H ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
TD1809224HB	Ball	24	20~28	5.0	2000	797	1355	1.45	363	92	1650
TD1809248HB	Ball	48	24~57	2.5	2000	797	1355	1.45	363	92	1650


EC SPECIFICATIONS

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Voltage Range (电压范围) [VAC]	Power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [In-H ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
TE1809201HB	Ball	1~115	85~130	120	2000	797	1355	1.45	363	92	1670
TE1809202HB	Ball	1~230	85~265	120	2000	797	1355	1.45	363	92	1663




EC BOX

Dimensions Drawing

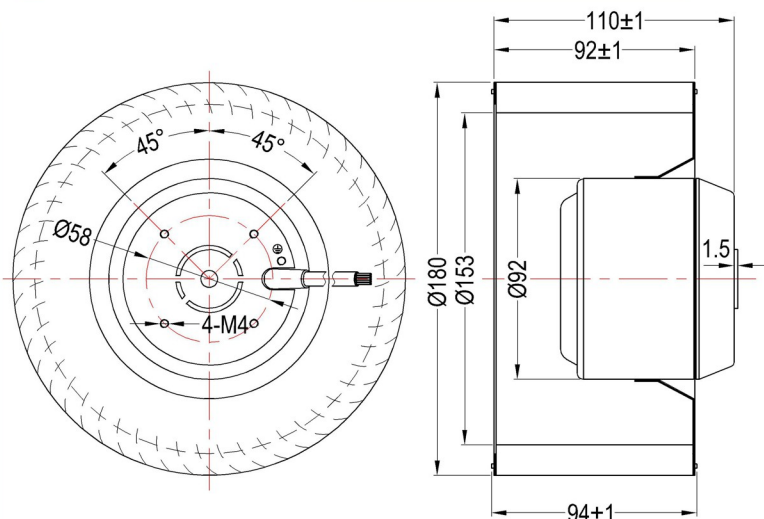

Air Flow & Static Pressure Curve

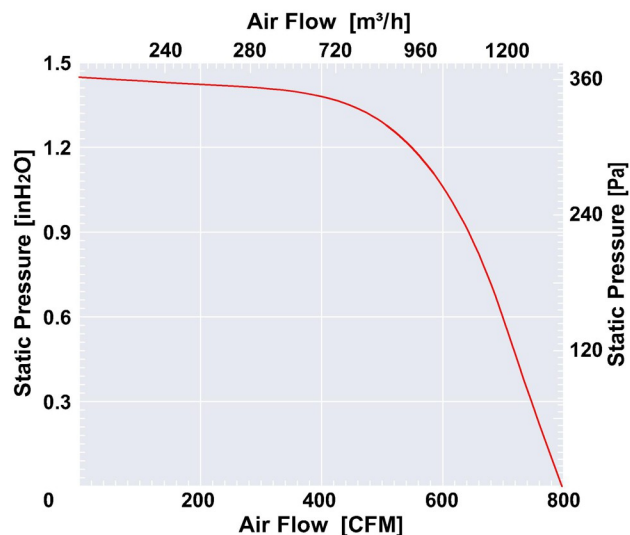

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。

普新惠达