



Impeller : 6 blades,made of aluminum

風 輪: 6叶,铝制

Motor : DC brushless motor

電 機: 直流无刷電機

Degree of protection : IP54


防护等级: IP54

Operating temperature : -25~+65°C

工作温度: -25~+65°C

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Voltage Range (电压范围) [VAC]	Freq. (频率) [Hz]	Input Power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [inH₂O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
YE310H110	Ball	1~115	80~135	50/60	380	2050	1658	2820	3.08	768	67	4400
YE310H220	Ball	1~230	180~265	50/60	380	2050	1658	2820	3.08	768	67	4400

Air Flow and Static Pressure

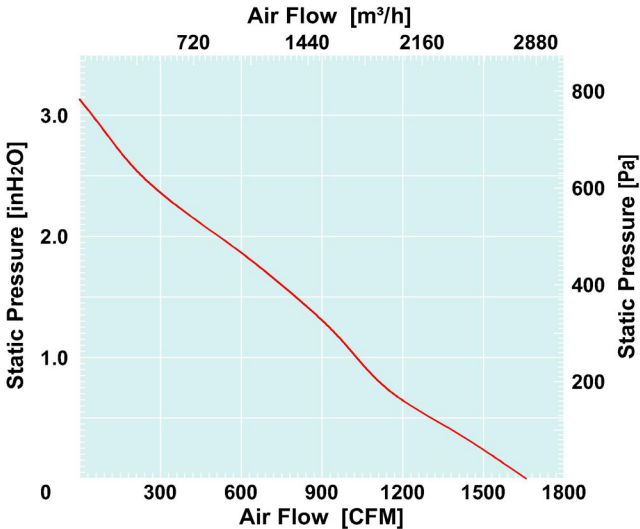

Dimensions Drawing

