

YE355 Series

EC Centrifugal Fan Ø355 x 195 mm

AUTO
RESTAR

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

Impeller : 6 blades,made of aluminum

風 輪: 6叶,铝制

Motor : DC brushless motor

電 機: 直流无刷電機

Degree of protection : IP54

防护等级: IP54


Operating temperature : -25~+65°C

工作温度: -25~+65°C




Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Voltage Range (电压范围) [VAC]	Freq. (频率) [Hz]	Input Power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [inH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
YE355H110	Ball	1~115	80~135	50/60	390	2000	2118.6	3600	4.1	1021.1	78	5700
YE355H220	Ball	1~230	180~265	50/60	390	2000	2118.6	3600	4.1	1021.1	78	5700

Air Flow and Static Pressure

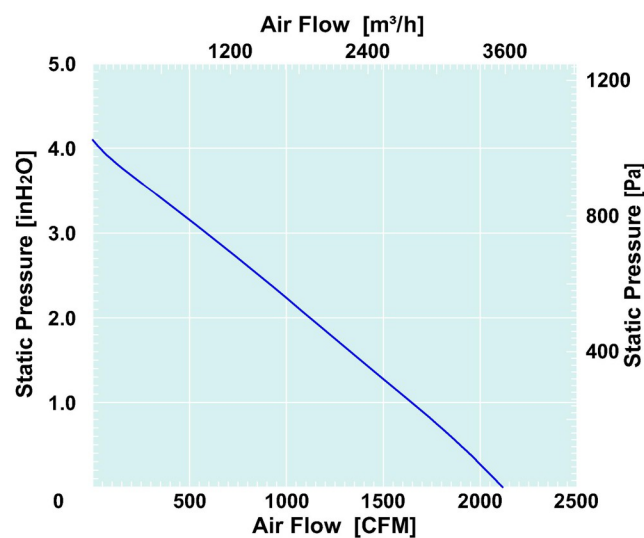

Dimensions Drawing

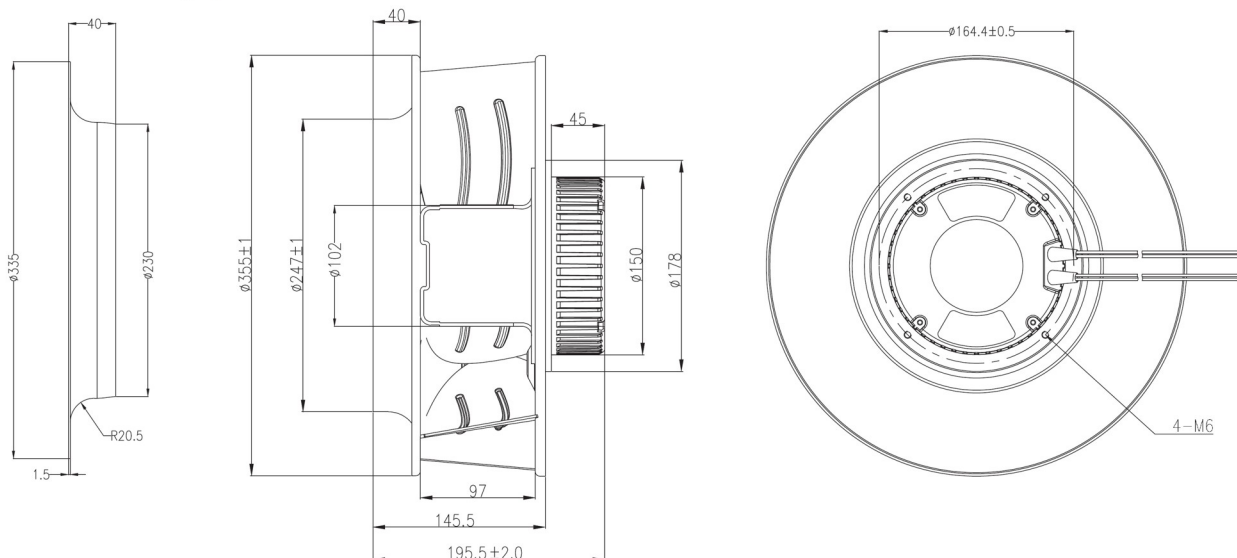

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。

普新惠达