

GW12038 DC AXIAL FAN

Series □ 120x120x38 mm

Impeller : 7 blades, made of plastic PBT UL94 V-0

扇 叶: 7叶, PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0

扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 poles brushless DC motor

電 機: 4极无刷直流电机

AUTO
(RESTART)

PWM

FG
SIGNAL H


RD
SIGNAL H

RD
SIGNAL L



Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH₂O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
GW1203805L	B/S	5	3.6~6.8	0.41	1500	52.8	1.5	0.11	27.4	30.5	296
GW1203812L	B/S	12	6.0~13.5	0.19	1500	52.8	1.5	0.11	27.4	30.5	296
GW1203824L	B/S	24	18.0~26.5	0.10	1500	52.8	1.5	0.11	27.4	30.5	296
GW1203812M	B/S	12	6.0~13.5	0.35	2500	97.9	2.77	0.30	74.7	41.5	298
GW1203824M	B/S	24	18.0~26.5	0.20	2500	97.9	2.77	0.30	74.7	41.5	298
GW1203848M	B/S	48	36.0~54.0	0.10	2500	97.9	2.77	0.30	74.7	41.5	298
GW1203812H	B/S	12	6.0~13.5	0.92	3500	139.4	3.95	0.54	134.5	50.0	300
GW1203824H	B/S	24	18.0~26.5	0.46	3500	139.4	3.95	0.54	134.5	50.0	300
GW1203848H	B/S	48	36.0~54.0	0.25	3500	139.4	3.95	0.54	134.5	50.0	300
GW1203812E	B/S	12	6.0~13.5	1.76	4500	167.2	4.735	0.88	219.1	56.5	303
GW1203824E	B/S	24	18.0~26.5	0.85	4500	167.2	4.735	0.88	219.1	56.5	303
GW1203848E	B/S	48	36.0~54.0	0.47	4500	167.2	4.735	0.88	219.1	56.5	303
GW1203812G	B/S	12	6.0~13.5	2.72	5500	214.0	6.05	1.35	336.2	60.5	305
GW1203824G	B/S	24	18.0~26.5	1.38	5500	214.0	6.05	1.35	336.2	60.5	305
GW1203848G	B/S	48	36.0~54.0	0.72	5500	214.0	6.05	1.35	336.2	60.5	305
GW1203812U	B/S	12	6.0~13.5	3.90	6500	252.5	7.15	1.77	440.7	66.0	305
GW1203824U	B/S	24	18.0~26.5	1.90	6500	252.5	7.15	1.77	440.7	66.0	305
GW1203848U	B/S	48	36.0~54.0	1.00	6500	252.5	7.15	1.77	440.7	66.0	305

Dimensions Drawing

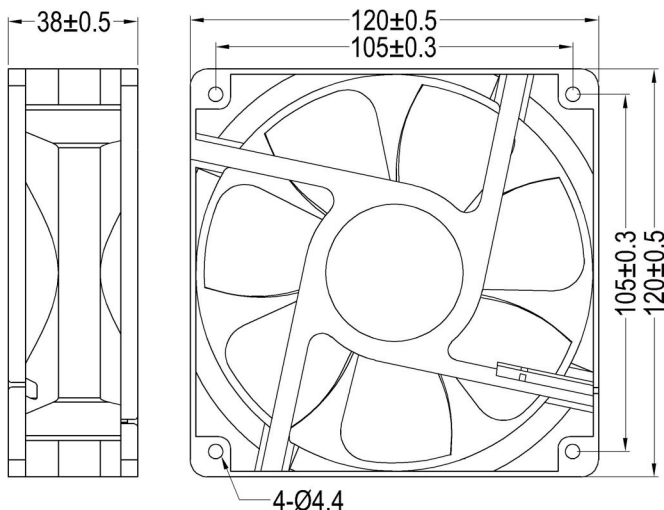

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。

Air Flow & Static Pressure Curve

