

GW14025 DC AXIAL FAN Series 140x140x25 mm

AUTO
(RESTAR)

PWM

FG

RD
SIGNAL H

RD
SIGNAL L



Impeller : 7 blades, made of plastic PBT UL94 V-0

扇 叶: 7叶, PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 poles brushless DC motor


電 機: 4极无刷直流电机

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH₂O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
GW1402512L	B/S	12	6.0~13.5	0.19	1500	68.3	1.93	0.10	24.9	32.5	161
GW1402524L	B/S	24	18.0~26.5	0.11	1500	68.3	1.93	0.10	24.9	32.5	161
GW1402512M	B/S	12	6.0~13.5	0.39	2000	91.2	2.58	0.14	34.9	37.0	164
GW1402524M	B/S	24	18.0~26.5	0.18	2000	91.2	2.58	0.14	34.9	37.0	164
GW1402512H	B/S	12	6.0~13.5	0.68	2500	121.5	3.44	0.19	47.3	42.5	166
GW1402524H	B/S	24	18.0~26.5	0.33	2500	121.5	3.44	0.19	47.3	42.5	166
GW1402512E	B/S	12	6.0~13.5	0.80	3000	136.8	3.87	0.25	62.25	47.5	168
GW1402524E	B/S	24	18.0~26.5	0.36	3000	136.8	3.87	0.25	62.25	47.5	168
GW1402512G	B/S	12	6.0~13.5	0.95	3500	150.4	4.26	0.31	77.2	51.0	168
GW1402524G	B/S	24	18.0~26.5	0.45	3500	150.4	4.26	0.31	77.2	51.0	168

Dimensions Drawing

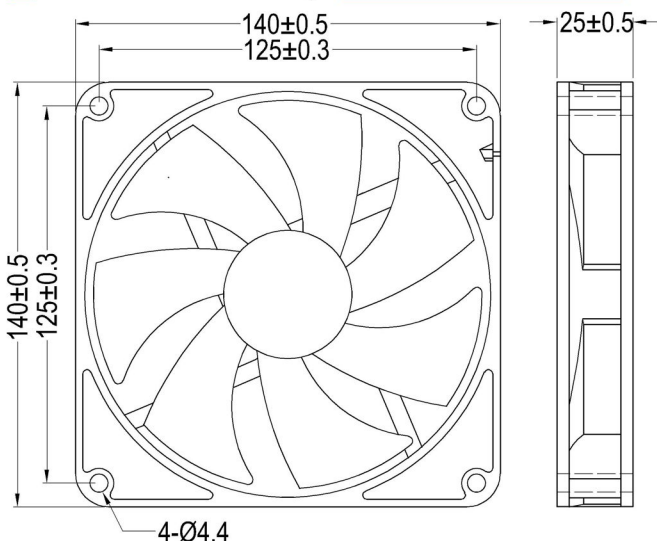

Air Flow & Static Pressure Curve

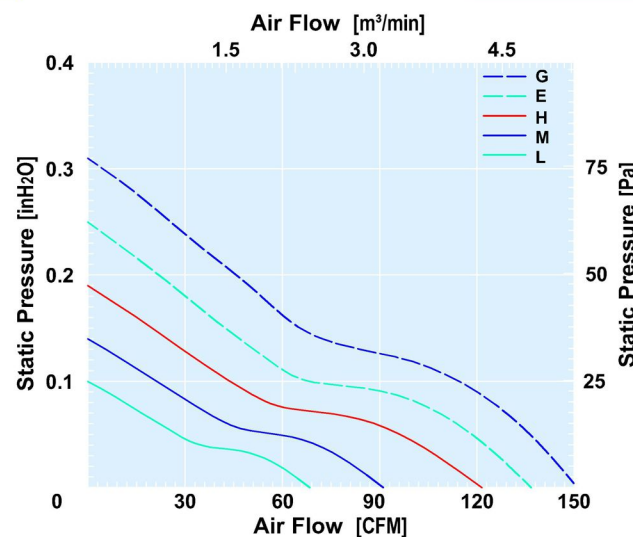

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。