

DC Centrifugal Fan Ø190 x 67 mm

YY190
Series



Impeller : 7 blades,made of GRP UL94 V-0

風 輪: 7叶,玻璃增强热固性塑料, 阻燃等级UL94 V-0

Motor : DC brushless motor

電 機: 直流无刷电机

Degree of protection : IP54


防护等级: IP54

Operating temperature : -25~+70°C


工作温度: -25~+70°C

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VDC]	Voltage Range (电压范围) [VDC]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [in-H ₂ O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
YY190L24	Ball	24	18.0~26.5	1.0	1900	231.2	393.2	0.70	175.5	62.0	1300
YY190M24	Ball	24	18.0~26.5	2.1	2600	317.8	540	1.32	329.0	68.8	1300
YY190H24	Ball	24	18.0~26.5	4.7	3500	426.1	724.4	2.40	596.0	75.2	1300
YY190L48	Ball	48	36.0~54.0	0.6	1900	231.2	393.2	0.70	175.5	62.0	1300
YY190M48	Ball	48	36.0~54.0	1.0	2600	317.8	540	1.32	329.0	68.8	1300
YY190H48	Ball	48	36.0~54.0	2.5	3500	426.1	724.4	2.40	596.0	75.2	1300

Air Flow & Static Pressure Curve

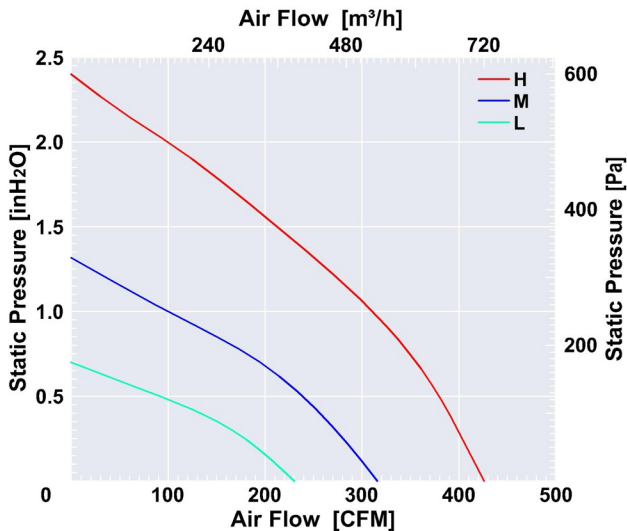

Dimensions Drawing

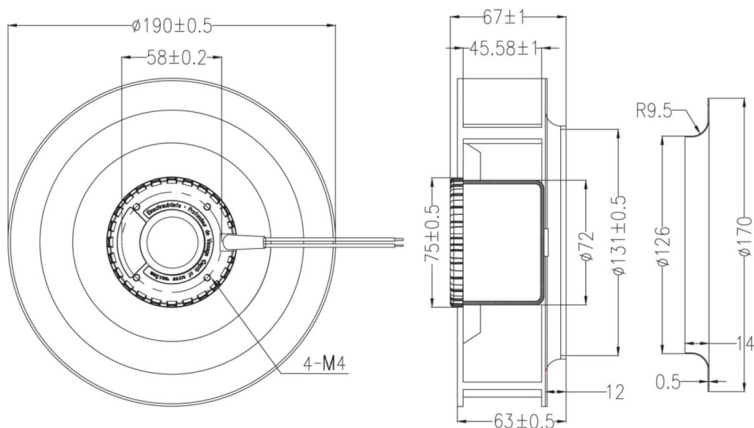

普新惠达

Above specification is only for reference and subject to change without notice.
以上数据仅供参考，如有变更恕不另行通知。