

AUTO
RESTAR

FG
UUUU

RD
SIGNAL H

RD
SIGNAL L

DC AXIAL FAN

□ 30 x 30 x 10 mm

GW3010
Series



Impeller : 5 blades ,made of plastic PBT UL94 V-0

扇 叶: 5叶, PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 poles brushless DC motor


電 機: 4极无刷直流电机

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH₂O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
GW301005L	B/S	5	3.6~6.8	0.10	5800	2.56	0.07	0.102	25.4	21.5	7.2
GW301005L	B/S	12	6.0~13.5	0.03	5800	2.56	0.07	0.102	25.4	21.5	7.2
GW301005M	B/S	5	3.6~6.8	0.15	8500	3.46	0.10	0.148	36.8	26.5	7.4
GW301012M	B/S	12	6.0~13.5	0.05	8500	3.46	0.10	0.148	36.8	26.5	7.4
GW301005H	B/S	5	3.6~6.8	0.17	10500	4.30	0.12	0.176	43.8	29	7.5
GW301012H	B/S	12	6.0~13.5	0.08	10500	4.30	0.12	0.176	43.8	29	7.5
GW301005E	B/S	5	3.6~6.8	0.22	13000	5.56	0.16	0.231	57.5	32	7.6
GW301012E	B/S	12	6.0~13.5	0.09	13000	5.56	0.16	0.231	57.5	32	7.6

Air Flow & Static Pressure Curve

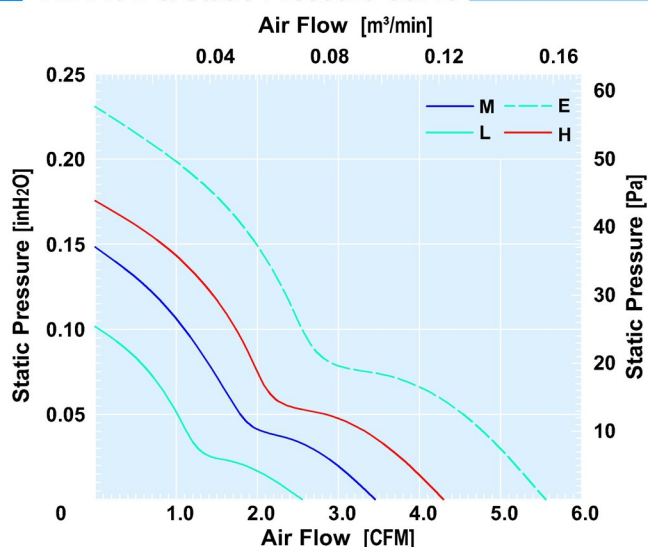

Dimensions Drawing

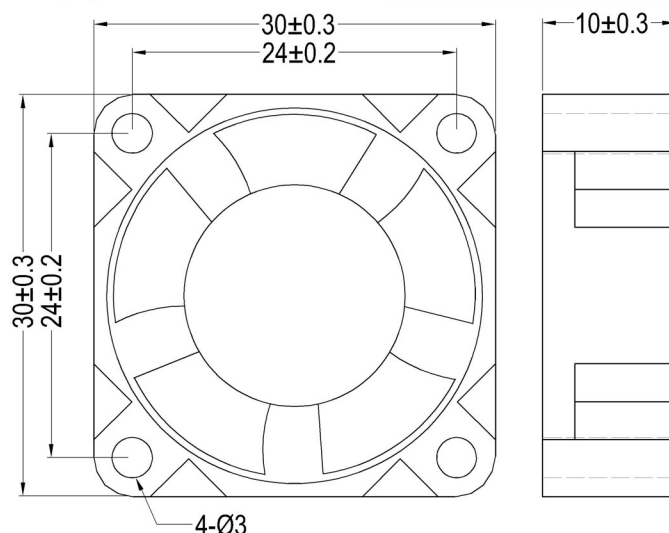

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。