

报警功能 (Alarm Function)

RoHS     




AC AXIAL FAN
□ 120x120x38 mm

GW12038
Series

Impeller : 5 blades,made of plastic PBT
扇 叶: 5叶 PBT塑料
Frame : Made of die-cast aluminum ADC-12
扇 框: 压铸铝 ADC-12
Motor : Shaded pole induction motor
電 機: 罩极异步电机
Motor Protection : Impedance protection
电机保护: 阻抗保护


Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Freq. (频率) [Hz]	Current (电流) [A]	Input power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [in-H ₂ O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
GW120381AH	B/S	115	50/60	0.27/0.21	25/19	2600/3000	87/103	2.5/2.9	0.28/0.34	70/85	43/49	520
GW120382BH	B/S	230	50/60	0.13/0.09	22/15	2600/3000	87/103	2.5/2.9	0.28/0.34	70/85	43/49	520




Rotation detection function(RD signal) of all the AC axial fan according to customer demand production.

全系列AC轴流风扇均可按客户需求制作旋转检测功能(RD信号)【堵转报警】。

Air Flow & Static Pressure Curve

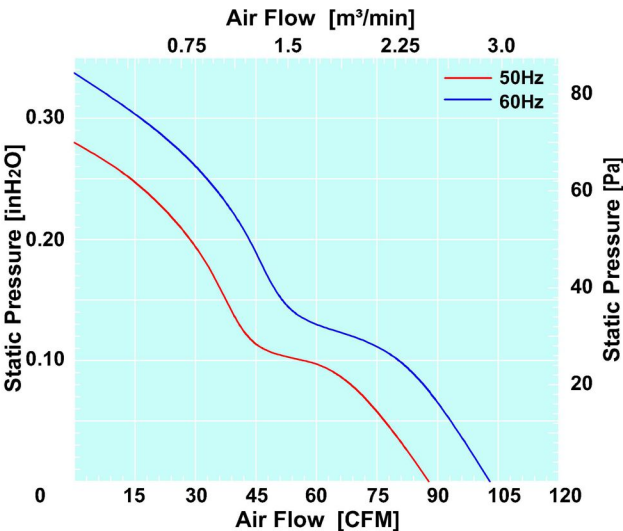

Dimensions Drawing

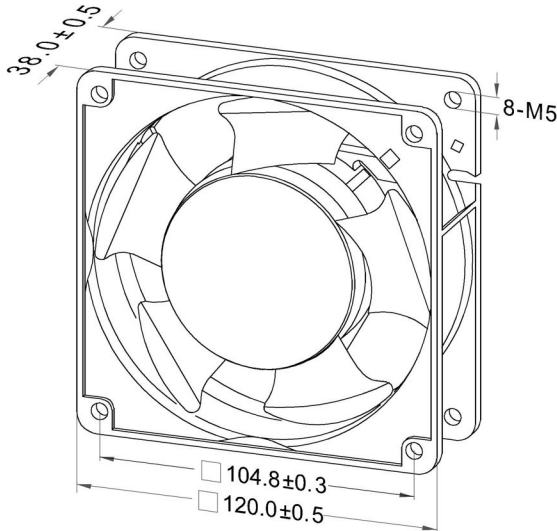

普新惠达

Above specification is only for reference and subject to change without notice.
以上数据仅供参考，如有变更恕不另行通知。

AIR SPACE

交流轴流风扇

www.pudaelec.com