

B5015
Series

DC Blower Fan
50 x 50 x 15 mm



RoHS

Impeller : Made of GRP(PBT) UL94 V-0

風 輪: 玻璃增强热固性塑料PBT, 阻燃等级UL94 V-0

Volute : Made of GRP(PBT) UL94 V-0

蜗 壳: 玻璃增强热固性塑料PBT, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor

電 機: 4极无刷直流电机

Degree of protection : IP54

防护等级: IP54


Insulation class : B

绝缘等级:B




Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VDC]	Voltage Range (电压范围) [VDC]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH₂O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
B5015L05	B/S	5	3.6~6.8	0.16	4300	2.87	0.081	0.40	100	35	25
B5015L12	B/S	12	6.0~13.5	0.09	4300	2.87	0.081	0.40	100	35	25
B5015M05	B/S	5	3.6~6.8	0.30	4900	3.31	0.093	0.49	122	37	26
B5015M12	B/S	12	6.0~13.5	0.12	4900	3.31	0.093	0.49	122	37	26
B5015M24	B/S	24	18.0~26.5	0.07	4900	3.31	0.093	0.49	122	37	26
B5015H05	B/S	5	3.6~6.8	0.37	5800	3.43	0.097	0.59	147	42.4	27
B5015H12	B/S	12	6.0~13.5	0.18	5800	3.43	0.097	0.59	147	42.4	27
B5015H24	B/S	24	18.0~26.5	0.09	5800	3.43	0.097	0.59	147	42.4	27
B5015HH12	B/S	12	6.0~13.5	0.32	6500	3.67	0.104	0.82	204	45	27.5
B5015HH24	B/S	24	18.0~26.5	0.15	6500	3.67	0.104	0.82	204	45	27.5

Dimensions Drawing

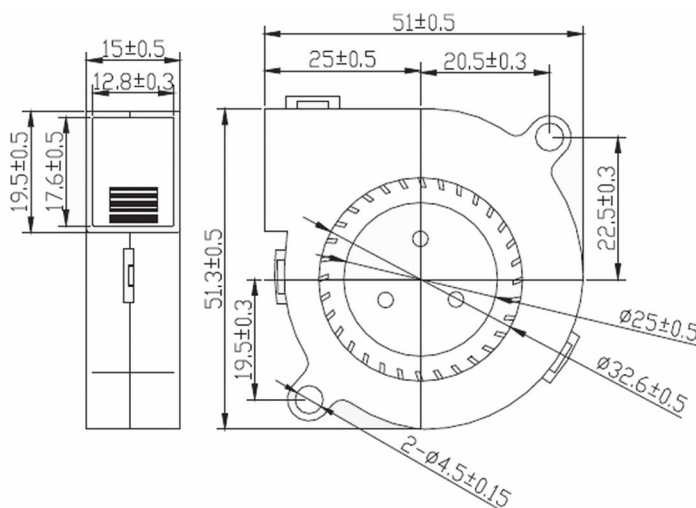

Air Flow & Static Pressure Curve

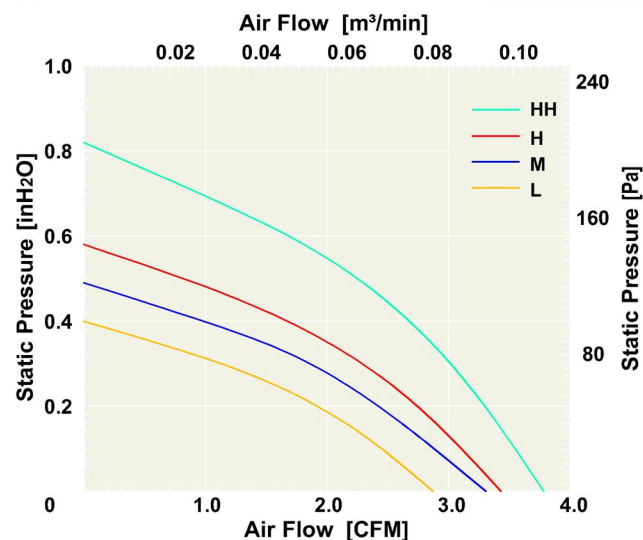

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。

普新惠达

AIR SPACE

直流鼓風機

www.pudaelec.com