

B7530
Series

DC Blower Fan
75 x 75 x 30 mm



RoHS

Impeller : Made of GRP(PBT) UL94 V-0

風輪: 玻璃增强热固性塑料PBT, 阻燃等级UL94 V-0

Volute : Made of GRP(PBT) UL94 V-0

蜗壳: 玻璃增强热固性塑料PBT, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor

電機: 4极无刷直流電機

Degree of protection : IP54

防护等级: IP54


Insulation class : B

绝缘等级:B




Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VDC]	Voltage Range (电压范围) [VDC]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH₂O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
B7530L12	B/S	12	6.0~13.5	0.12	2000	6.31	0.18	0.2	49.8	32	75
B7530L24	B/S	24	18.0~26.5	0.08	2000	6.31	0.18	0.2	49.8	32	75
B7530M12	B/S	12	6.0~13.5	0.23	2500	8.34	0.24	0.26	74.7	37	76
B7530M24	B/S	24	18.0~26.5	0.11	2500	8.34	0.24	0.26	74.7	37	76
B7530H12	B/S	12	6.0~13.5	0.28	3000	10.35	0.29	0.38	94.6	41.5	78
B7530H24	B/S	24	18.0~26.5	0.14	3000	10.35	0.29	0.38	94.6	41.5	78
B7530H48	B/S	48	36.0~54.0	0.07	3000	10.35	0.29	0.38	94.6	41.5	78
B7530HH12	B/S	12	6.0~13.5	0.35	3400	11.0	0.31	0.50	124.5	43	78.5
B7530HH24	B/S	24	18.0~26.5	0.20	3400	11.0	0.31	0.50	124.5	43	78.5
B7530HH48	B/S	48	36.0~54.0	0.09	3400	11.0	0.31	0.50	124.5	43	78.5
B7530VH24	B/S	24	18.0~26.5	0.30	3700	12.66	0.36	0.64	159.4	46	78.5
B7530VH48	B/S	48	36.0~54.0	0.14	3700	12.66	0.36	0.64	159.4	46	78.5

Dimensions Drawing

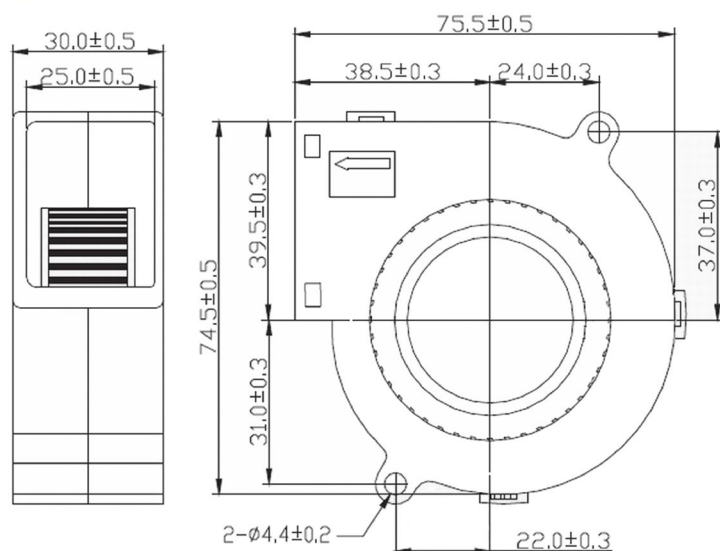

Air Flow & Static Pressure Curve

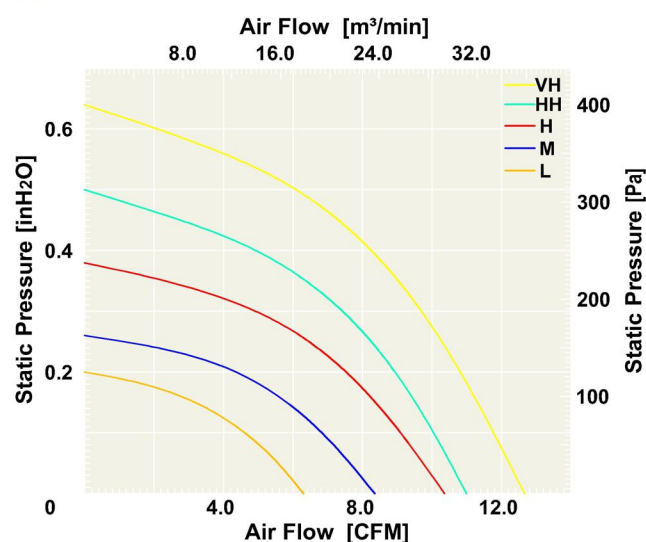

Above specification is only for reference and subject to change without notice.

以上数据仅供参考, 如有变更恕不另行通知。

普新惠达

AIR SPACE

直流鼓風機

www.pudaelec.com