



Impeller : Made of GRP(PBT) UL94 V-0

風 輪: 玻璃增强热固性塑料PBT, 阻燃等级UL94 V-0

Volute : Made of GRP(PBT) UL94 V-0

蜗 壳: 玻璃增强热固性塑料PBT, 阻燃等级UL94 V-0

Motor : 4 Poles brushless DC motor

電 機: 4极无刷直流电机

Degree of protection : IP54


防护等级: IP54

Insulation class : B

绝缘等级: B

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VDC]	Voltage Range (电压范围) [VDC]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
B12032L12	B/S	12	6.0~13.5	0.6	2500	25.11	0.71	0.80	199	50	218
B12032L24	B/S	24	18.0~26.5	0.29	2500	25.11	0.71	0.80	199	50	218
B12032M12	B/S	12	6.0~13.5	0.8	2800	26.13	0.74	1.012	252	53	220
B12032M24	B/S	24	18.0~26.5	0.35	2800	26.13	0.74	1.012	252	53	220
B12032M48	B/S	48	36.0~54.0	0.18	2800	26.13	0.74	1.012	252	53	220
B12032H12	B/S	12	6.0~13.5	1.0	3000	27.32	0.77	1.13	281.4	55.5	220
B12032H24	B/S	24	18.0~26.5	0.6	3000	27.32	0.77	1.13	281.4	55.5	220
B12032H48	B/S	48	36.0~54.0	0.3	3000	27.32	0.77	1.13	281.4	55.5	220
B12032HH12	B/S	12	6.0~13.5	1.46	3300	29.02	0.82	1.4	348	60	220
B12032HH24	B/S	24	18.0~26.5	0.75	3300	29.02	0.82	1.4	348	60	220
B12032HH48	B/S	48	36.0~54.0	0.4	3300	29.02	0.82	1.4	348	60	220

Air Flow & Static Pressure Curve

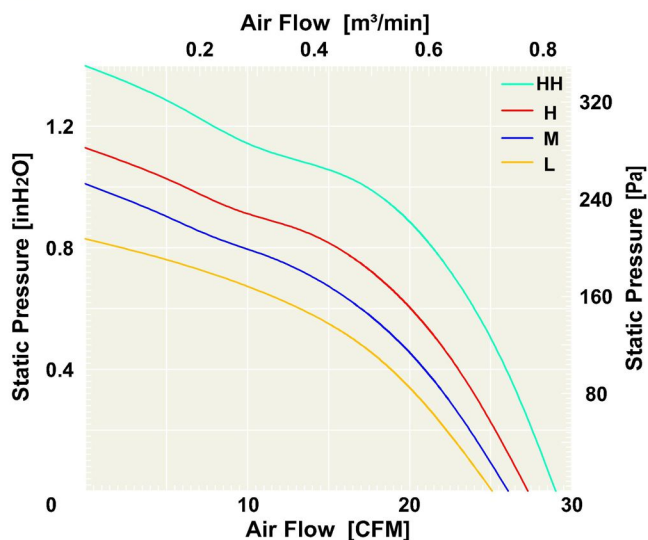

Dimensions Drawing

