

AC Centrifugal Fan
Ø175 x 69 mm

JH175
Series



Impeller : 7 blades,made of GRP (PA 66) UL94 V-0
風 輪: 7叶,玻璃增强热固性塑料(尼龍66),阻燃等级UL94V-0

Motor : Enter rotor & Capacitor-run induction motor
電 機: 外转子电容运转异步電機


Degree of protection : IP44
防护等级: IP44

Insulation class : F
绝缘等级: F


Operating temperature : -25~+70°C
工作温度: -25~+70°C

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Freq. (频率) [Hz]	Current (电流) [A]	Input power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [In-H ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
JH175B2E01	Ball	1~115	60	0.45	60	3100	335	570	1.4	350	63	1000
JH175B2E02	Ball	1~230	50	0.28	51	2750	288	490	1.0	250	60	1000

Air Flow & Static Pressure Curve

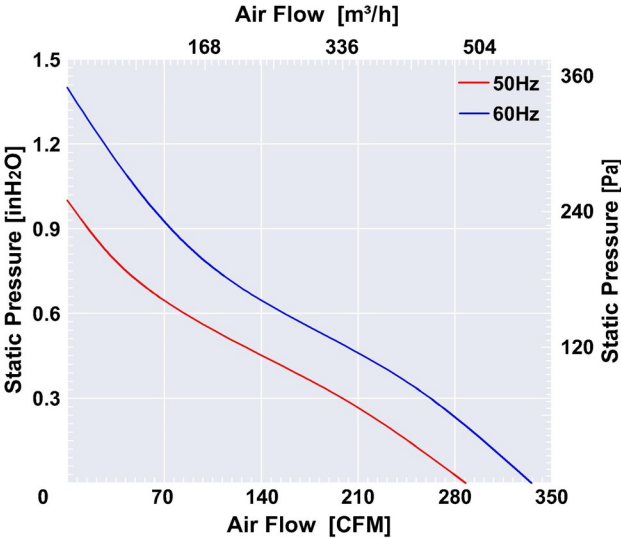

Dimensions Drawing

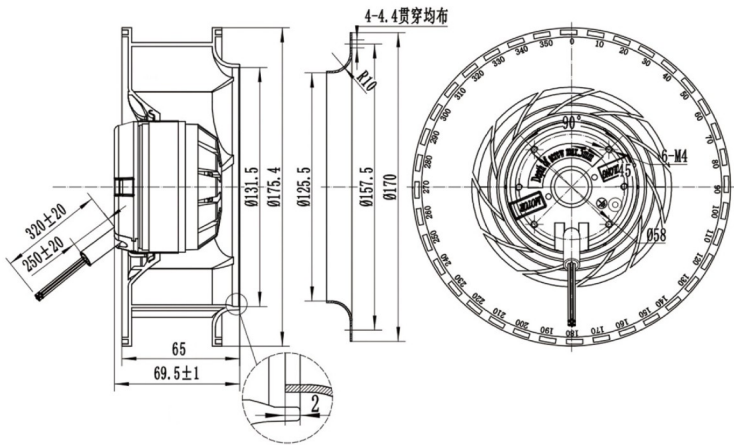

Above specification is only for reference and subject to change without notice.
以上数据仅供参考，如有变更恕不另行通知。