



Impeller : 6 blades,made of aluminum

風 輪: 6叶, 铝制

Motor : Enter rotor & Capacitor-run induction motor

電 機: 外转子电容运转异步電機

Degree of protection : IP44

防护等级: IP44

Insulation class : F


绝缘等级: F

Operating temperature : -25~+80°C

工作温度: -25~+80°C

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VAC]	Freq. (频率) [Hz]	Current (电流) [A]	Input power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [in-H ₂ O]	Max. Static Pressure (静压) [Pa]	Niose Level (噪音) [dB-A]	Mass (质量) [g]
JH320A4E02	Ball	1~230	50	0.69	120	1600	1148	1950	1.6	400	66	3600
JH320A4E03	Ball	3~380	50	0.23	100	1400	995	1690	1.4	350	62	3600
JH320B4E01	Ball	1~115	60	1.50	162	1600	1402	2380	1.8	450	78	3850
JH320B4E02	Ball	1~230	50	0.60	135	1400	1254	2130	1.4	350	75	3850
JH320B4E03	Ball	3~380	50	0.45	134	1400	1254	2130	1.4	350	75	3850

Air Flow & Static Pressure Curve

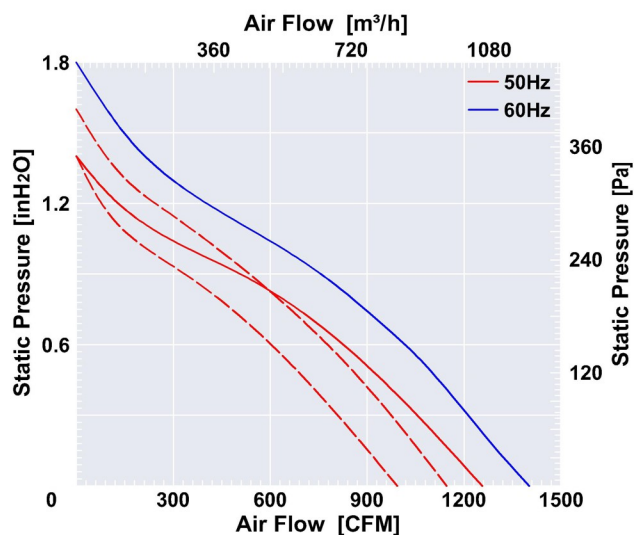

Dimensions Drawing

