



DC AXIAL FAN

□ 120x120x25 mm

GW12025
Series

Impeller : 7 blades, made of plastic PBT UL94 V-0

扇 叶: 7叶, PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of plastic PBT UL94 V-0


扇 框: PBT塑料制, 阻燃等级UL94 V-0

Motor : 4 poles brushless DC motor


電 機: 4极无刷直流电机

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH₂O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
GW1202505L	B/S	5	3.6~6.9	0.43	1500	53.35	1.51	0.07	17.4	26	115
GW1202512L	B/S	12	6.0~13.5	0.18	1500	53.35	1.51	0.07	17.4	26	115
GW1202505M	B/S	5	3.6~6.9	0.71	2000	69.75	2.0	0.11	27.4	33	120
GW1202512M	B/S	12	6.0~13.5	0.27	2000	69.75	2.0	0.11	27.4	33	120
GW1202524M	B/S	24	18.0~26.5	0.17	2000	69.75	2.0	0.11	27.4	33	120
GW1202512H	B/S	12	6.0~13.5	0.65	2600	85.61	2.42	0.18	44.8	41	123
GW1202524H	B/S	24	18.0~26.5	0.30	2600	85.61	2.42	0.18	44.8	41	123

Air Flow & Static Pressure Curve

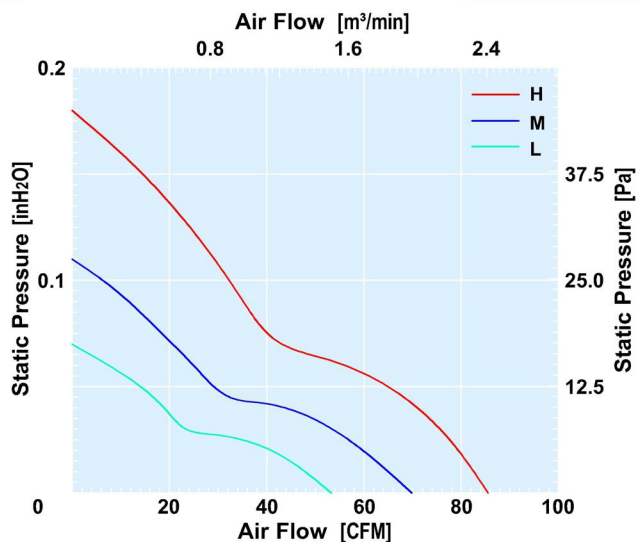

Dimensions Drawing

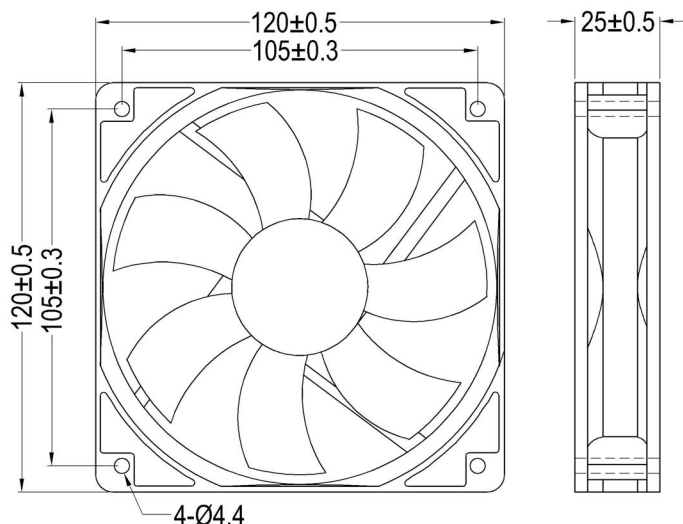

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。