

YY355 Series

DC Centrifugal Fan Ø355 x 168 mm

AUTO
RESTAR

PWM

FG

RD
SIGNAL H

RD
SIGNAL L

Impeller : 6 blades,made of aluminum

風 輪: 6叶,铝制

Motor : DC brushless motor

電 機: 直流无刷电机

Degree of protection : IP54

防护等级: IP54


Operating temperature : -25~+70°C

工作温度: -25~+70°C




Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [VDC]	Voltage Range (电压范围) [VDC]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/h]	Max. Static Pressure (静压) [in-H₂O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
YY355M48	Ball	48	36.0~54.0	5.5	1500	1275.9	2169.0	2.3	574.3	63.8	4000
YY355H48	Ball	48	36.0~54.0	7.3	2000	2118.6	3601.6	4.1	1020.1	78	4000

Dimensions Drawing

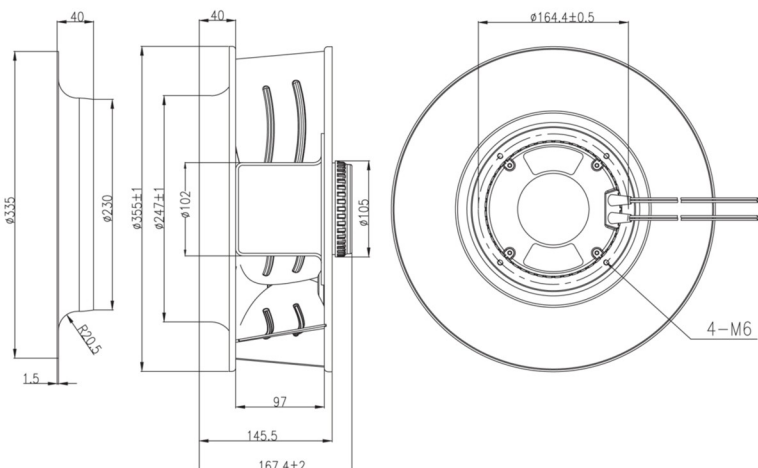

Air Flow & Static Pressure Curve

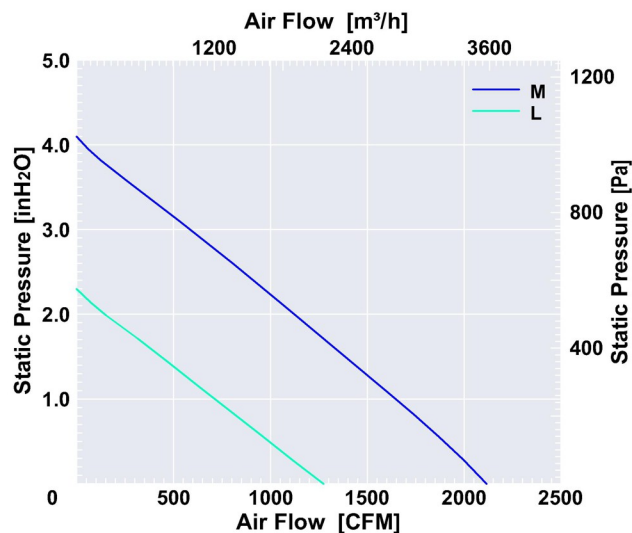

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。

普新惠达