



AC AXIAL FAN
□ 225x225x80mm

TG22580
Series

Impeller : 7 blades,made of sheet steel
扇 叶: 7叶, 钢板


Frame : Made of die-cast aluminum ADC-12
扇 框: 压铸铝 **ADC-12**

Motor : External rotor & capacitor-run induction motor
電 機: 外转子电容运转异步电机

Motor Protection : Thermally protection
电机保护: 热保护

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Freq. (频率) [Hz]	Current (电流) [A]	Input power (功率) [W]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [in-H₂O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
TG22580HA1	Ball	1~115	50/60	0.68/0.65	76/72	2700/3000	597/634	17.0/18.0	0.66/0.73	165/182	59/61	2100
TG22580HA2	Ball	1~230	50/60	0.27/0.35	62/78	2700/3000	597/634	17.0/18.0	0.66/0.73	165/182	59/61	2100
TG22580HA3	Ball	1~380	50/60	0.21/0.19	60/70	2700/3000	597/634	17.0/18.0	0.66/0.73	165/182	59/61	2100
TG22580HA3L	Ball	3~380	50/60	0.21/0.19	60/70	2700/3000	597/634	17.0/18.0	0.66/0.73	165/182	59/61	2100

Air Flow & Static Pressure Curve

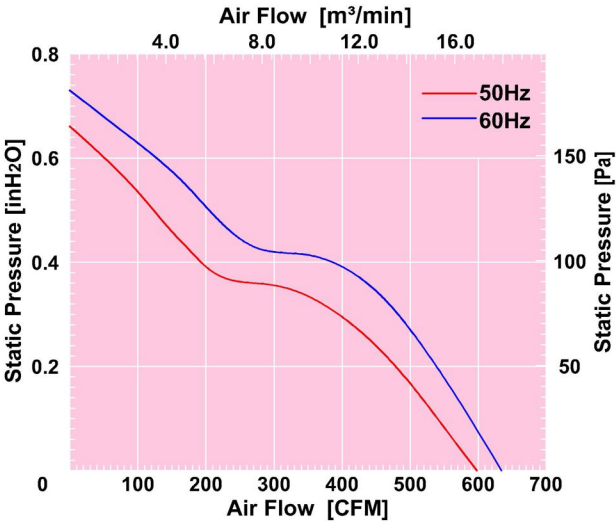

Dimensions Drawing

