



DC AXIAL FAN

Ø254 x 89 mm

GW25489
Series



Impeller : 3 blades, made of plastic PBT UL94 V-0

扇 叶: 3叶, PBT塑料制, 阻燃等级UL94 V-0

Frame : Made of die-cast aluminum ADC-12


扇 框: 压铸铝 ADC-12

Motor : 6 poles brushless DC motor


電 機: 6极无刷直流电机

Model (型号)	Bearing System (轴承)	Rated Voltage (电压) [V]	Voltage Range (电压范围) [V]	Current (电流) [A]	Speed (转速) [RPM]	Maximum Air Flow (风量) [CFM]	Maximum Air Flow (风量) [m³/min]	Max. Static Pressure (静压) [inH ₂ O]	Max. Static Pressure (静压) [Pa]	Noise Level (噪音) [dB-A]	Mass (质量) [g]
GW2548912L	Ball	12	6.0~13.5	0.75	1000	308	8.72	0.49	122	51	2600
GW2548924L	Ball	24	18.0~26.5	0.5	1000	308	8.72	0.49	122	51	2600
GW2548948L	Ball	48	36.0~54.0	0.2	1000	308	8.72	0.49	122	51	2600
GW2548912M	Ball	12	6.0~13.5	3.5	2000	565	16.0	0.65	162	62	2600
GW2548924M	Ball	24	18.0~26.5	1.5	2000	565	16.0	0.65	162	62	2600
GW2548948M	Ball	48	36.0~54.0	0.8	2000	565	16.0	0.65	162	62	2600
GW2548924H	Ball	24	18.0~26.5	3.7	3000	864	24.5	1.36	338.6	73.5	2600
GW2548948H	Ball	48	36.0~54.0	1.9	3000	864	24.5	1.36	338.6	73.5	2600
GW2548924E	Ball	24	18.0~26.5	7.8	4000	1321	37.4	1.70	423.3	90	2600
GW2548948E	Ball	48	36.0~54.0	4.0	4000	1321	37.4	1.70	423.3	90	2600

Air Flow & Static Pressure Curve

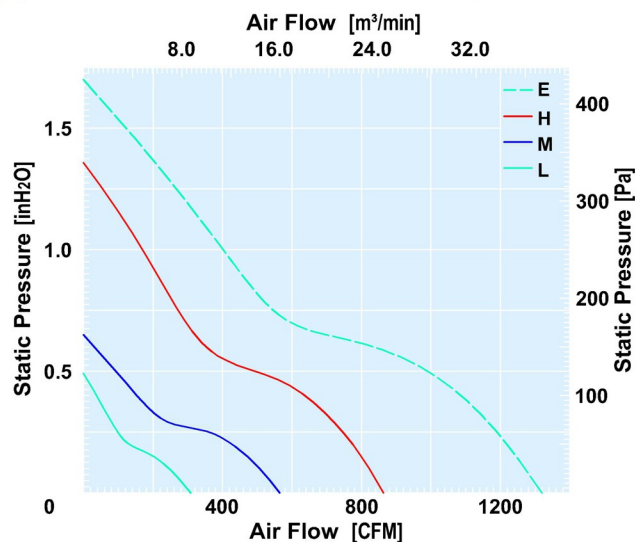

Dimensions Drawing

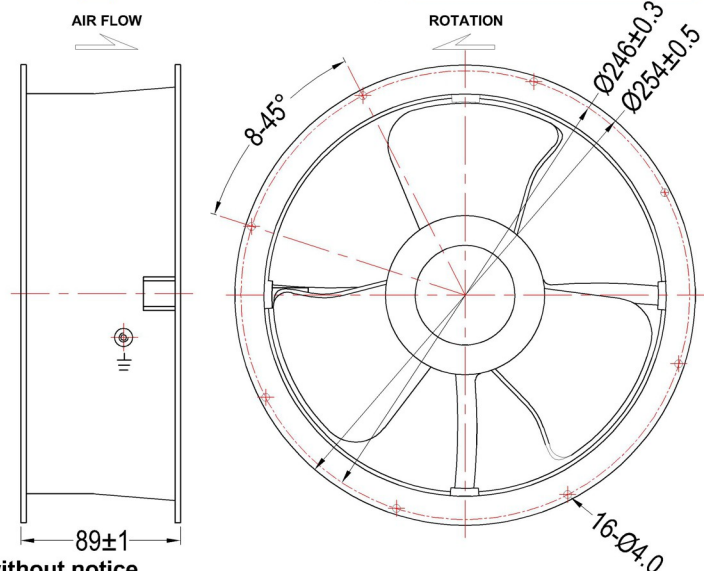

Above specification is only for reference and subject to change without notice.

以上数据仅供参考，如有变更恕不另行通知。